

Scale Racing Cars®

At Silverstone tyre testing the 88B appeared in J.P.S. - Essex colours on Michelin tyres but by the Grand Prix practice had changed to Courage sponsorship and Goodyear tyres. This kit includes all the markings required to build either version.

JPS/Courage 88B Colour Guide

- | | |
|-------------------------|---|
| ① Gloss Black :- | Body, Side Plates, Mirrors, Air Box, Rear Wing. |
| ② Semi-Matt Black :- | Front & Rear Suspension, Seat, Steering-Wheel, Small (body) Shock Absorbers, Engine Cam Covers, Front Brake Ducts, Gear Box Oil Pipe. |
| ③ Matt Black & Green :- | Carbon Fibre Cockpit Section, Dashboard. |
| ④ Alloy :- | Engine, Gearbox. |
| ⑤ Polished Metal :- | Mirror Stalks, Steering Arms, Shock Absorbers (in cockpit), Gear Lever, Roll Hoop, Engine Intakes, Wheel Rims. |
| ⑥ Orange :- | Dashboard Warning Light. |
| ⑦ Red :- | Rear Light (on gearbox). |
| ⑧ Silver :- | Sideplate Louvres, Pipes behind Cockpit, Ignition Box (on engine). |
| ⑨ Natural Metal :- | Radiators, Springs. |
| ⑩ Matt Grey :- | Exhaust Pipes. |
| ⑪ Gold :- | Wheel Centres. |

Building your 1/43rd Scale Racing Car


Please check that all parts are present before removing any 'flash' left by the casting process with suitable shaped needle files and a modellers knife. It may be necessary to clear some locating holes with a small drill.








Referring to the drawings showing various stages of assembly, test fit the components together, trimming if required to ensure a perfect fit. Any surface imperfections should be filled with cellulose putty and the castings carefully rubbed with wet-or-dry paper or steel wool before washing all parts in warm soapy water to remove any grease.

Using an auto spray apply a thin coat of primer carefully following the makers instructions, When dry gently smooth the surface with very fine (No. 600) wet-or-dry paper, used wet, before spraying the gloss finish. The small parts should be painted with model enamel using our guide as a reference.

Assemble the model using quick setting epoxy adhesive or instant glue, removing paint to achieve a better bond, and taking care not to use too much. The transfers are waterslide type and after cutting up the backing sheet require soaking in warm water to release them.

Use a fine paint brush to pick up the small ones.

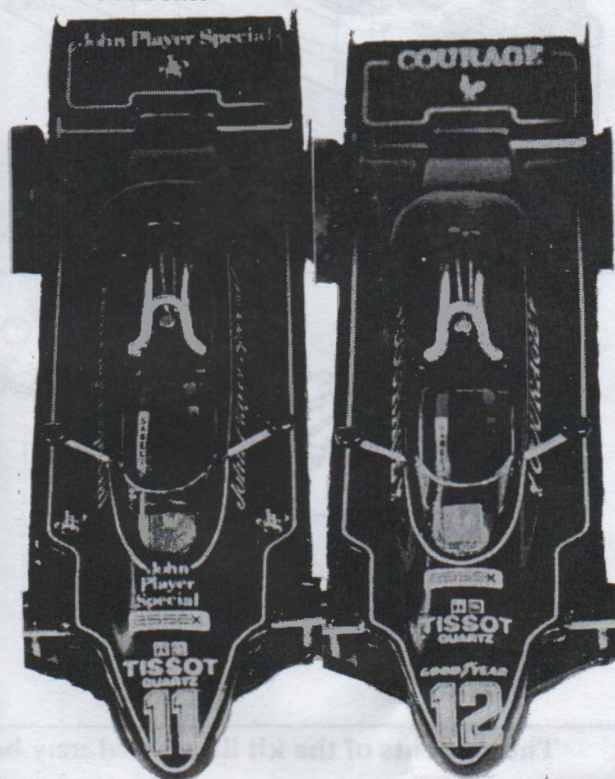

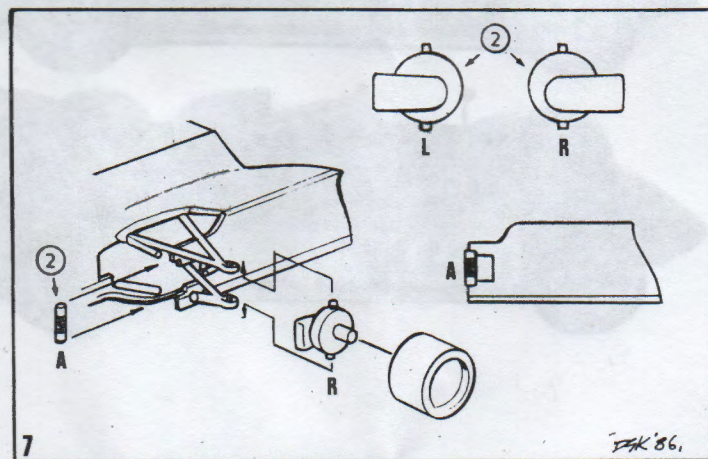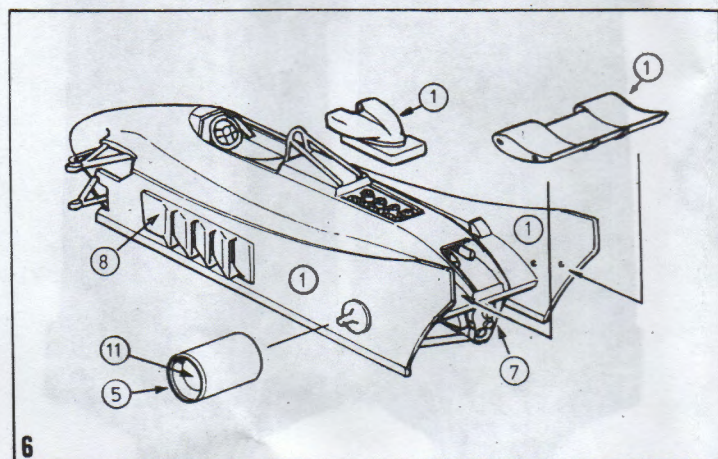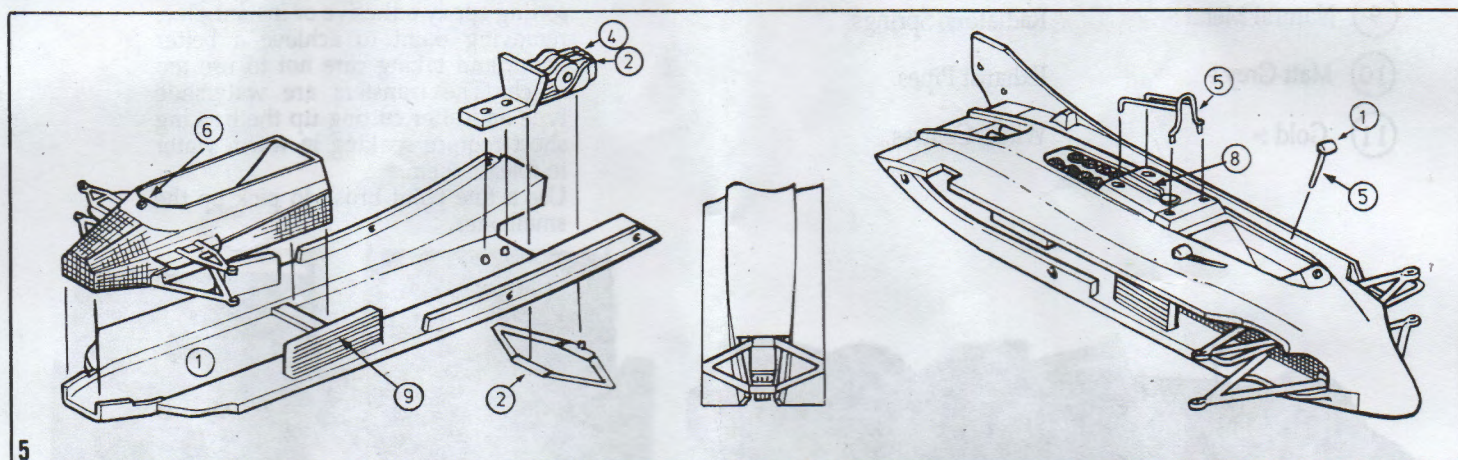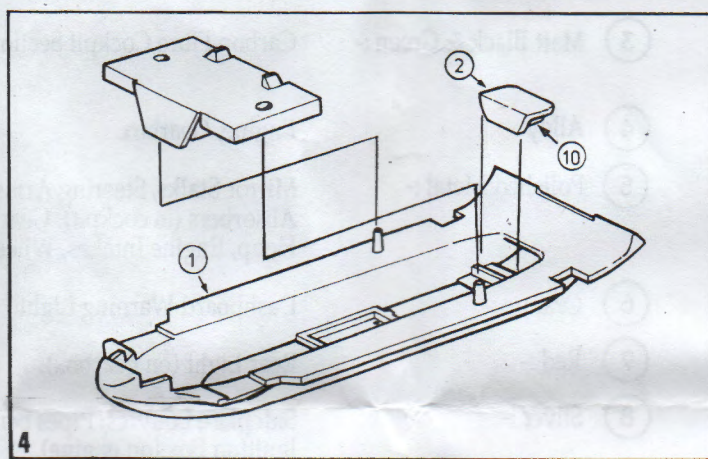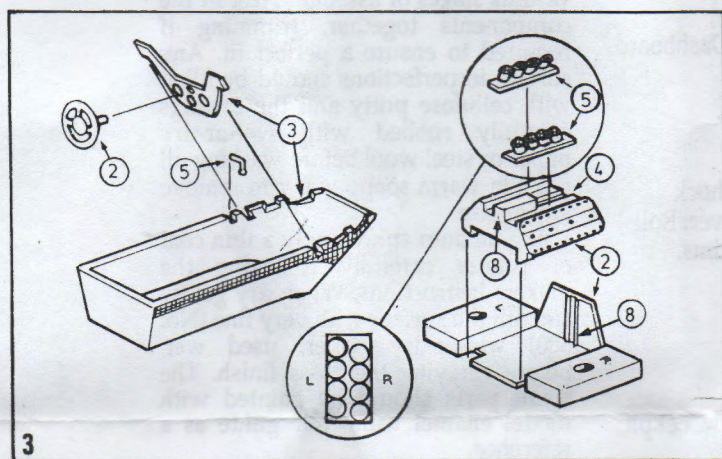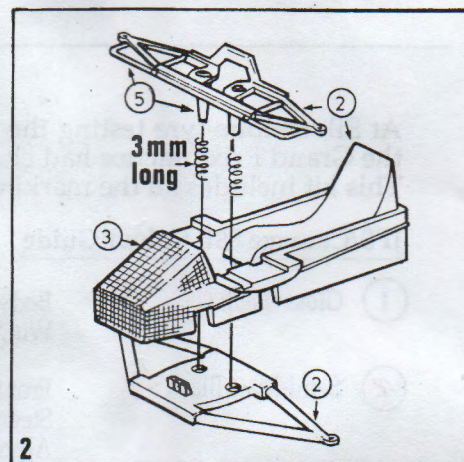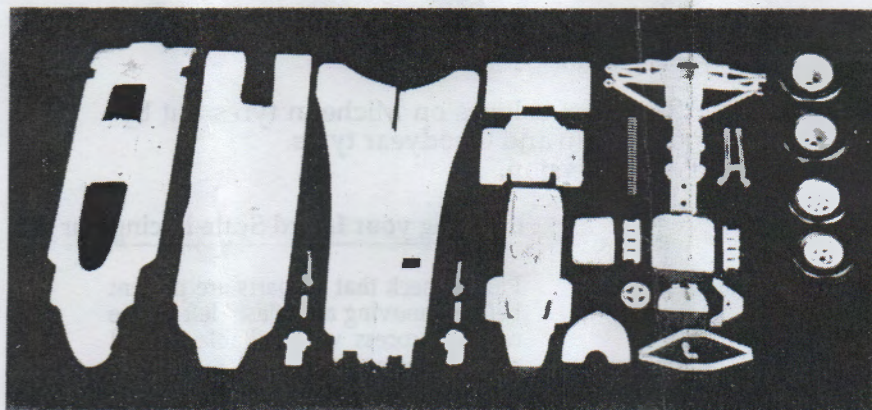

The contents of the kit illustrated may be modified as we continue to improve our products.